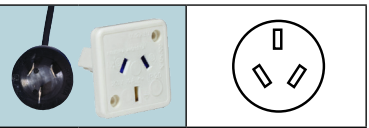
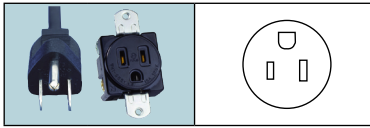


# Guide to Worldwide Plug and Socket Patterns & Power Mains (Single-Phase)

Country	Voltage	Freq/Hz	Pattern	Country	Voltage	Freq/Hz	Pattern	Country	Voltage	Freq/Hz	Pattern	Country	Voltage	Freq/Hz	Pattern
Afghanistan	220	50	C1, E2, F1	Ecuador	120	60	A1, B1, B4	Libya	127/230	50	C1, D1, E1, E2, F1, L1	Saint Pierre & Miquelon (Fr.)	115	60	A1, B1, B4, C1, E1 E2, F1
Albania	230	50	C1, E1, E2, F1	Egypt	220	50	C1, E2, F1	Liechtenstein	230	50	C1, J1, J2	Samoa	230	50	I1, I2, I3
Algeria	230	50	C1, E1, E2, F1	El Salvador	115	60	A1, B1, G1	Lithuania	220	50	C1, E2, F1	San Marino	230	50	C1, E2, F1, L1
American Samoa	120	60	120V- A1, B1 240V- F1, I1	Equatorial Guinea	220	50	C1, E1 E2, F1	Luxembourg	230	50	C1, E2, F1	Sao Tome & Principe	220	50	C1, E2, F1
Andorra	230	50	C1, E2, F1	Eritrea	230	50	C1, E2, F1, I1	Macau	220	50	D1, E2, F1, G1	Saudi Arabia	127/220	60	A1, B1, G1
Angola	220	50	C1, E2, F1	Estonia	230	50	C1, E2, F1	Macedonia	230	50	C1, E2, F1	Senegal	230	50	C1, E1, E2, F1
Anguilla	110	60	A1, B1, D1, G1	Ethiopia	220	50	C1, E1, E2, F1, L1, L2	Madagascar	127/220	50	C1, E1 E2	Serbia	230	50	C1, E2, F1
Antigua & Barbuda	230	60	A1, B1, G1	Falkland Islands (Malvinas)	240	50	C1, G1	Malawi	230	50	G1	Seychelles	240	50	D1, G1
Argentina	220	50	I6, I7	Faroe Islands	230	50	C1, E1, E2, F1, K1	Malaysia	240	50	D1, G1	Sierra Leone	230	50	D1, G1
Armenia	230	50	C1, E2, F1	Fiji	240	50	I1, I2, I3	Maldives	230	50	A1, C1, D1 G1 J1, K1, L1	Singapore	230	50	D1, G1
Aruba	127	60	A1, B1, C1, E2, F1	Finland	230	50	C1, E2, F1	Mali	220	50	C1, E1, E2, F1	Slovakia	230	50	C1, E1, E2, F1
Australia	230	50	I1, I2, I3	France	230	50	C1, E1 E2	Malta	230	50	G1	Slovenia	230	50	C1, E2, F1
Austria	230	50	C1, E2, F1	French Guiana	220	50	C1, E1 E2, F1	Martinique	220	50	C1, E1, E2, F1	Solomon Islands	220	50	C1, E2, F1, G1, I1, I2, I3
Azerbaijan	220	50	C1, E2, F1	Gabon	220	50	C1, E1, E2, F1	Mauritania	220	50	C1, E2, F1	Somalia	220	50	C1, E1, E2, F1
Bahamas	120	60	A1, B1, B4	Gambia	230	50	D1, G1	Mauritius	230	50	C1, G1	South Africa	230	50	D1, N3
Bahrain	230	50	D1, G1	Georgia	220	50	C1, E2, F1	Mexico	127	60	A1, B1, B3, B4, B5	Spain	230	50	C1, E1, E2, F1
Bangladesh	220	50	D1, G1	Germany	230	50	C1, E2, F1	Micronesia, Federated States of	120	60	A2, B2	Sri Lanka	230	50	D1, G1
Barbados	115	50	A1, B1, B4	Ghana	230	50	G1	Moldova	220	50	C1, E2, F1	Sudan	230	50	C1, D1, G1
Belarus	220	50	C1, E2, F1	Gibraltar	240	50	C1, D1, E1, E2, F1, G1	Monaco	230	50	C1, D1, E1 E2, F1	Suriname	127	60	A1, B1, C1, E2, F1
Belgium	230	50	C1, E2, F1	Greece	230	50	C1, E2, F1	Mongolia	220	50	C1, E1, E2, F1	Swalbard (Norway)	220-240	50	C1, E2, F1
Belize	110/220	60	A1, B1, B4, C1, G1	Greenland	230	50	C1, K1, K2, K3	Montenegro	230	50	C1, E2, F1	Swaziland	230	50	D1, G1
Benin	220	50	A1, C1, E2, F1	Grenada	230	50	D1, G1	Montserrat	230	60	A1, B1, G1	Sweden	230	50	C1, E2, F1
Bermuda	120	60	A1, B1, B4	Guadeloupe	230	50	C1, E1 E2, G1	Morocco	127/220	50	C1, E1, E2, F1	Switzerland	230	50	C1, J1, J2
Bhutan	230	50	C1, D1, E2, F1, G1	Guam	110	60	A1, B1, B4	Mozambique	220	50	C1, D1, E2, F1	Syrian Arab Republic	220	50	C1, E1, E2, F1, L1
Bolivia	115/230	50	A1, B1, B4, C1	Guatemala	120	60	A1, B1, B4	Myanmar	230	50	C1, D1, E2, F1, G1	Tahiti	220	60	A1, B1, B4, C1, E1, E2, F1
Bosnia & Herzegovina	230	50	C1, E2, F1	Guinea	220	50	C1, E1 E2, F1	Namibia	220	50	D1, G1	Taiwan	110	60	A2, B2 I1, I4
Botswana	230	50	D1, G1	Guinea Bissau	220	50	C1, E2, F1	Nauru	240	50	I1, I2, I3	Tajikistan	220	50	C1, E2, F1
Brazil	127/220	60	A1, B1, B4, C1, N1, N2	Guyana	240	60	A1, B1, D1, G1	Nepal	230	50	C1, D1, E2, F1, G1	Tanzania	230	50	D1, G1, O1, P1
British Virgin Islands	110	60	A1, B1, B4, G1	Haiti	110	60	A1, B1, B4	Netherlands Antilles	230	50	C1, E2, F1	Thailand	220	50	A1, B1, B4, C1, E2, F1, H2
Brunei	240	50	D1, G1	Honduras	110	60	A1, B1, B4	New Caledonia	220	50	C1, E1, E2, F1	Timor-Leste (East Timor)	220	50	C1, E1, E2, F1, I1
Bulgaria	230	50	C1, E2, F1	Hong Kong	220	50	D1, G1	New Zealand	230	50	I1, I2, I3	Togo	220	50	C1, E1, E2, F1
Burkina Faso	220	50	C1, E1, E2, F1	Hungary	230	50	C1, E2, F1	Nicaragua	120	60	A1, B1, B4	Tonga	240	50	I1, I2
Burundi	220	50	C1, E1, E2, F1	Iceland	230	50	C1, E2, F1	Niger	220	50	A1, B1, C1, D1, E1, E2, F1	Trinidad & Tobago	115	60	A1, B1, B4
Cambodia	230	50	A1, C1, E2, F1, G1	India	230	50	D1, M1	Nigeria	230	50	D1, G1	Tunisia	230	50	C1, E1, E2, F1
Cameroon	220	50	C1, E1 E2, F1	Indonesia	220/110	50	C1, E1, E2, F1	Norway	230	50	C1, E2, F1	Turkey	230	50	C1, D1, E2, F1, G1
Canada	120	60	A1, B1, B3, B4, B5	Iran	220	50	C1, E2, F1	Oman	240	50	C1, G1	Turkmenistan	220	50	B1, C1, E2, F1
Canary Islands (Spain)	220	50	C1, E1, E2, F1	Iraq	230	50	C1, D1, E2, F1, G1	Pakistan	230	50	C1, D1, E1, E2, F1	Turks & Caicos Islands	120	60	A1, B1
Canary Islands	220	50	C1, E1, E2, F1	Ireland	230	50	G1 G2	Palau	120	60	A1, B1	Tuvalu	220	50	I1, I2, I3
Cape Verde	220	50	C1, E2, F1	Isle of Man	240	50	D1, G1	Panama	110	60	A1, B1, B4	Uganda	240	50	D1, G1
Cayman Islands	120	60	A1, B1	Israel	230	50	C1, H1	Papua New Guinea	240	50	I1, I2, I3	Ukraine	220	50	C1, E2, F1
Central African Republic	220	50	C1, E1, E2, F1	Italy	230	50	C1, L1, L2	Paraguay	220	50	C1, E2, F1	United Arab Emirates	230	50	C1, D1, G1
Chad	220	50	C1, E1, E2, F1	Jamaica	110	50	A1, B1, B4, D1, G1	Peru	220	60	A1, B1, C1, E2, F1	United Kingdom	230	50	D1, G1
Channel Islands	240	50	C1, D1, E1, E2, F1, G1	Japan	100	50/60	A2 B2	Philippines, Rep. of the	220	60	A1, B1, B4, C1	United States, Virgin Islands	110	60	A1, B1, B4
Chile	220	50	C1, E1, F1, L1	Jordan	230	50	C1, D1, E2, F1, G1	Pitcairn Island (UK)	240	50	D1	United States of America	120	60	A1, B1, B3, B4, B5
China	220	50	I4, I5	Kazakhstan	220	50	C1, E2, F1	Poland	230	50	C1, E1, E2, F1	Uruguay	230	50	C1, E2, F1, I1*, L1, L2
Christmas Island (Australia)	240	50	I1, I2, I3	Kenya	240	50	D1, G1	Portugal	230	50	C1, E2, F1	Uzbekistan	220	50	C1, E2, F1, I1
Cocos Island (Australia)	240	50	I1, I2, I3	Kiribati	240	50	I1	Puerto Rico	120	60	A1, B1, B4	Vanuatu	220	50	C1, E2, F1, G1, I1
Colombia	110	60	A1, B1, C1, E2, F1	Korea, Republic of (South Korea)	220	60	A2, B2, B4, C1, E2, E3 F1	Qatar	240	50	D1, G1	Venezuela	120	60	A1, B1, B4, C1, E2, F1
Comoros	220	50	C1, E2, F1	Kuwait	240	50	D1, G1	Reunion	220	50	C1, E1 E2	Vietnam	220	50	A1, B1, B4, C1, E1, E2, F1
Congo, Republic of the	230	50	C1, E2, F1	Kyrgyzstan	220	50	C1, E2, F1	Romania	230	50	C1, E2, F1	Yemen	230	50	D1, G1
Congo, Democratic Republic of	220	50	C1, E1, E2, F1	Lao People's Democratic Republic (Laos)	230	50	A1, B1, B4, C1, E1, E2, F1	Russia	220	50	C1, E2, F1	Zambia	230	50	C1, D1, E2, F1, G1
Cook Islands	240	50	I1, I2, I3	Latvia	230	50	C1, E2, F1	Rwanda	230	50	C1, E2, F1, J1	Zimbabwe	220	50	D1, G1
Costa Rica	120	60	A1, B1, B4, G1	Lebanon	220	50	A1, A2, C1, D1, E2, F1, G1	Saint Kitts and Nevis	230	60	D1, G1				
Cote d'Ivoire	230	50	C1, E1, E2, F1	Lesotho	220	50	D1, G1	Saint Lucia	240	50	G1				
Croatia	230	50	C1, E2, F1					Saint Martin	120/220	60	C1, E2, F1				
Cuba	110	60	A1, B1, B4, C1, E2, F1												
Curacao Island	110/220	60	A1, B1, B4, C1, E2, F1												
Cyprus	240	50	D1, G1												
Czech Republic	230	50	C1, E1, E2, F1												
Denmark	230	50	C1, K1, K2, K3												
Djibouti	220	50	C1, E1, E2, F1												
Dominica	230	50	D1, G1												

# Guide to Worldwide Plug and Socket Patterns & Power Mains (Single-Phase)

<p><b>A1</b> 15A/125V North America</p>  <p>It is common to use a NEMA 5-15 socket with a NEMA 1-15 plug.</p> <p>standard: ANSI/NEMA WD 6 plug type: NEMA 1-15 plug: not available socket: 88212100 cord set: 86222105 or 86222285</p>	<p><b>B5</b> 20A/250V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA 6-20 plug: 88030180 socket: 88030030 or 88251100 cord set: 86226100</p>	<p><b>B11</b> 30A/250V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA L6-30 plug: 88030310 socket: 88030040 cord set: not available</p>	<p><b>E2</b> 10A France/Belgium</p>  <p>standard: IEC 60083 plug type: CEE 7/17 Class II socket type: CEE 7/5 plug: not available socket: 88010550 cord set: 86532200</p>	<p><b>H1</b> 16A Israel</p>  <p>standard: SI 32 plug: 88010781 socket: not available cord set: 86275010</p>	<p><b>I4</b> 10A China</p>  <p>standard: GB 1002 plug: 88040250 socket: 88040260 cord set: 86272010</p>	<p><b>J2</b> 16A Switzerland</p>  <p>standard: SN 441011 plug type: 23 plug: not available socket: 88011030 cord set: 86285110</p>	<p><b>L2</b> 16A Italy</p>  <p>standard: CEI 23-50 plug type: S17 plug: 88010873 socket: 88010672 cord set: 86260060</p>
<p><b>A2</b> 15A/125V Japan</p>  <p>It is common to use a Class I socket with a Class II plug.</p> <p>standard: JIS C 8303 plug type: JIS C 8303 Class II plug: not available socket: 88040350 cord set: 86277010</p>	<p><b>B6</b> 15A/125V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA L5-15 plug: 88030240 socket: 88030490 cord set: not available</p>	<p><b>B12</b> 30A 125/250V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA L14-30 plug: 88030760 socket: not available cord set: not available</p>	<p><b>E3</b> 16A/250V Korea</p>  <p>plug type: KSC8305 &amp; KC60884-1 plug: not available socket: not available cord set: 86263010</p>	<p><b>H2</b> 16A Thailand</p>  <p>PHOTO NOT AVAILABLE</p> <p>standard: TIS 166-2549 plug: not available socket: not available cord set: not available</p>	<p><b>I5</b> 16A China</p>  <p>standard: GB 1002 plug: not available socket: 88040360 cord set: 86272230</p>	<p><b>K1</b> 16A Denmark</p>  <p>standard: Afsnit 107-2-D1 plug type: DK-2-1A plug: 88010741 socket: 88010541 cord set: 86280010</p>	<p><b>M1</b> 16A India/South Africa</p>  <p>India: standard: IS 1293 plug: not available socket: not available cord set: 86559050 South Africa: standard: SANS 164-1 plug: 88010764 socket: 88010562 cord set: 86265070</p>
<p><b>B1</b> 15A/125V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA 5-15 plug: 88030100 socket: 88212100 cord set: 70401020244</p>	<p><b>B7</b> 15A/250V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA L5-20 plug: 88030220 socket: 88030660 cord set: not available</p>	<p><b>B15</b> 30A 120/208V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA L21-30 plug: 88030680 socket: 88031250 cord set: not available</p>	<p><b>F1</b> 16A Continental European</p>  <p>standard: IEC 60083 plug type: CEE 7/7 socket type: CEE 7 plug: 88010801 socket: 88052011 cord set: 86230110</p>	<p><b>I1</b> 10A Australia</p>  <p>standard: AS/NZS 3112 plug: 88010713 socket: 88010512 cord set: 86210720</p>	<p><b>I6</b> 10A Argentina</p>  <p>standard: IRAM 2073 plug: 88040270 socket: 88040290 cord set: 86270010</p>	<p><b>K2</b> 16A Denmark (Medical)</p>  <p>standard: Afsnit 107-2-D1 plug type: DK-2-8A plug: 88010940 socket: not available cord set: 86280810</p>	<p><b>N1</b> 10A Brazil</p>  <p>standard: NBR 14136 plug: 88040200 socket: 88040340 cord set: 86286110</p>
<p><b>B2</b> 15A/125V Japan</p>  <p>standard: JIS C 8303 plug: not available socket: 88040350 cord set: 86277160</p>	<p><b>B8</b> 20A/125V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA L5-20 plug: 88030140 socket: 88030510 cord set: not available</p>	<p><b>C1</b> 2.5A Europlug</p>  <p>standard: IEC 60083 plug type: CEE 7/16 plug: 88040030 socket: see K1, E1, E2, J1, L1, L2 cord set: 86234020</p>	<p><b>G1</b> 13A United Kingdom</p>  <p>standard: BS 1363 plug: 88040011 socket: 88010621 cord set: 86240150</p>	<p><b>I2</b> 15A Australia</p>  <p>standard: AS/NZS 3112 plug: 88010450 socket: 88010441 power cord: 86210250</p>	<p><b>I7</b> 20A Argentina</p>  <p>standard: IRAM 2073 plug: not available socket: not available cord set: 86270350</p>	<p><b>K3</b> 16A Denmark (Data)</p>  <p>standard: Afsnit 107-2-D1 plug type: DK-2-5A plug: not available socket: 88011040 cord set: not available</p>	<p><b>N2</b> 20A Brazil</p>  <p>standard: NBR 14136 plug: 88040300 socket: 88040340 cord set: 86286510</p>
<p><b>B3</b> 20A/125V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA 5-20 plug: 88030120 socket: 88030330 or 88231100 cord set: 86226020</p>	<p><b>B9</b> 20A/250V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA L6-20 plug: 88030160 socket: 88030530 cord set: not available</p>	<p><b>D1</b> 6A India/South Africa</p>  <p>India: standard: IS1293 plug: not available socket: not available cord set: not available South Africa: standard: SANS 164-1 plug: not available socket: not available cord set: not available</p>	<p><b>G2</b> 13A United Kingdom (Data)</p>  <p>standard: BS 1363 plug: 88010470 socket: 88010460 cord set: not available</p>	<p><b>I3</b> 20A Australia</p>  <p>standard: AS/NZS 3112 plug: 88010455 socket: not available cord set: not available</p>	<p><b>J1</b> 10A Switzerland</p>  <p>standard: SN 441011 plug type: 12 plug: 88010732 socket: 88010530 or 88052041 cord set: 86285010</p>	<p><b>L1</b> 10A Italy</p>  <p>standard: CEI 23-50 plug type: S11 plug: 88010772 socket: 88010572 cord set: 86394000</p>	<p><b>N3</b> 16A South Africa</p>  <p>standard: SANS 164-2 plug: not available socket: not available cord set: not available</p>
<p><b>B4</b> 15A/250V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA 6-15 plug: 88030200 socket: 88030450 or 88241100 cord set: 86610100</p>	<p><b>B10</b> 30A/125V North America</p>  <p>standard: ANSI/NEMA WD 6 plug type: NEMA L5-30 plug: 88031070 socket: not available cord set: not available</p>	<p><b>E1</b> 16A France/Belgium</p>  <p>standard: IEC 60083 plug type: CEE 7/7 plug: 88010801 socket: 88010550 cord set: 86230110</p>					