

**Basic Introduction:**


1. According to: GB/T4208-2008 / IEC 61032:1997 / IEC 60529:2001 and UL
2. IP4X Test Probe D (Test Probe D) is necessary appliance for household and similar electrical appliance of against electric shock protection test.

**Technical parameters:**

1. Test Probe Length: 100mm
2. Test Prober Diameter: 1.0mm
3. Dam- sphere Diameter: 35mm
4. Handle Diameter: 10mm
5. Handle Length: 100mm
6. According to IEC 61032 figure 4 (the Test probe D), Table 6 GB/T4208-2008 (the first characteristic digital 4/5/6)

**Application:**

1. Standard test refers to the joint part can't touch the live parts or close to the dangerous parts, 30mm circular baffle can not be enter.
2. In the test requirement for preventing access to the hazardous parts, Test Probe D need to be with thrust  $1\pm 0.1N$

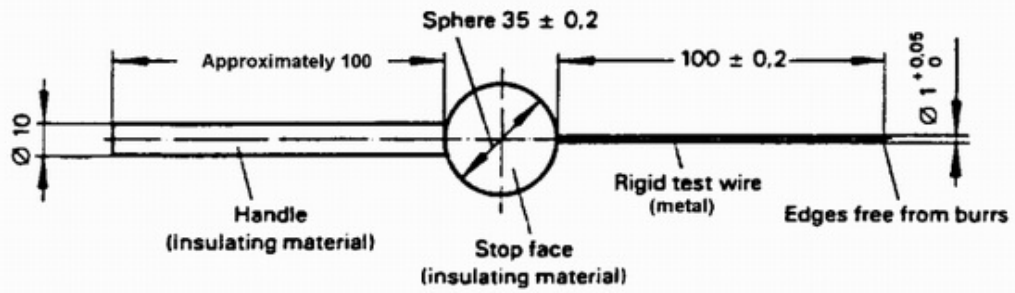

*Dimensions in millimetres*

This wire is intended to verify the protection of persons against access to hazardous parts. It is also used to verify the protection against access with a wire.

**Figure 4 – Test probe D**